



PTOG1206BY-B1 SERIES (128 * 64 DOTS)




龐誼科技股份有限公司
Palm Technology Co., Ltd.

EXTERNAL DIMENSION

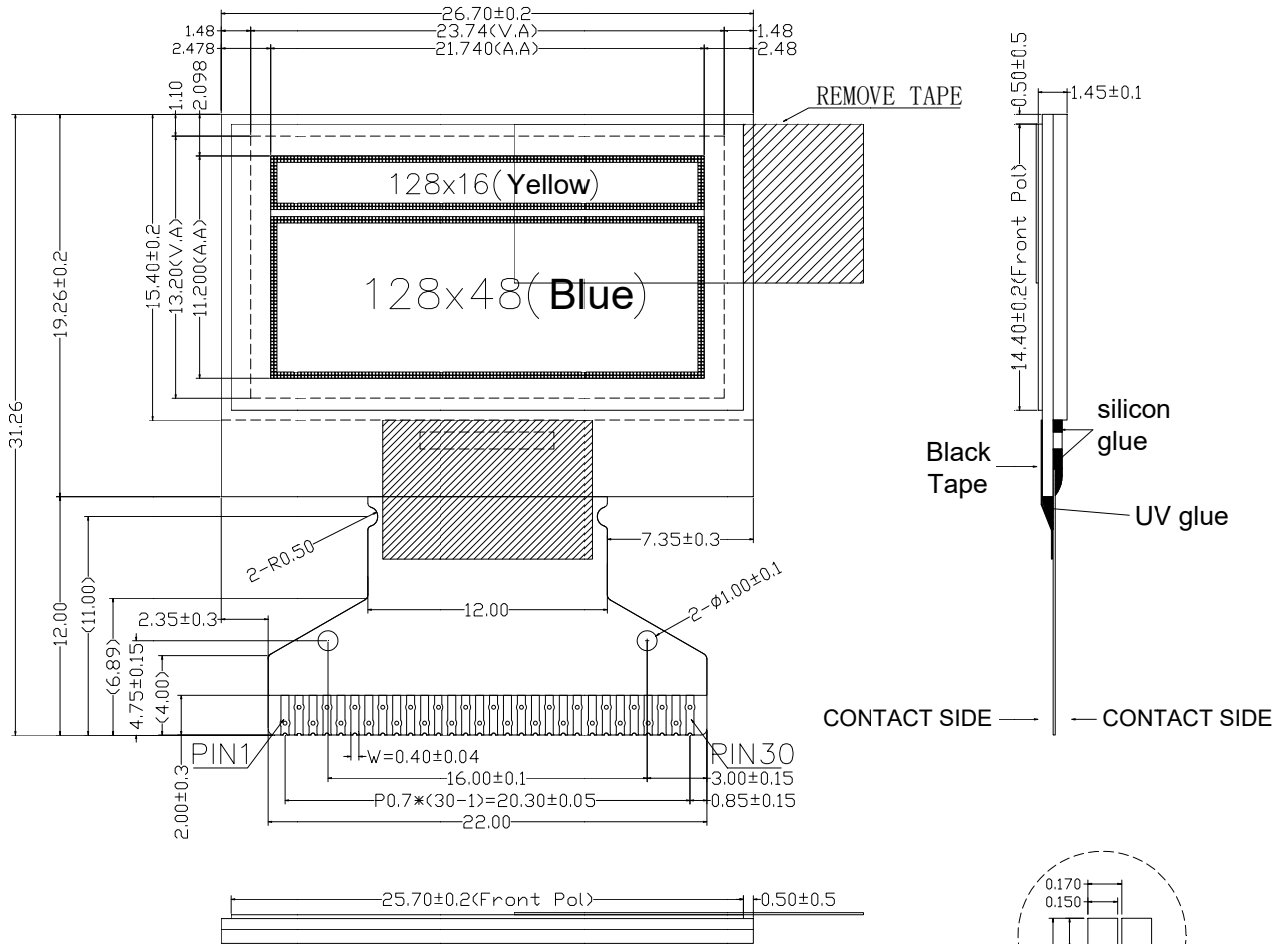

- NOTES:
1. OPERATING TEMP:-20°C TO 70°C
 2. STORAGE TEMP: -30°C TO 80°C
 3. VIEWING DIRECTION:ALL
 4. OLED DRIVE IC:SSD1306BZ
 5. DISPLAY COLOR: Light Blue& Yellow
 6. UNSPECIFIED TOLERANCES: ±0.2mm.
 7. () MEANS: DIMENSION FOR REFERENCE
 8. THE PROTECTIVE FILMS ON BOTH SIDES OF OLED MUST BE REMOVED BEFORE ASSEMBLY BY CUSTOMER



Dots Detail
Scale 10X

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	NC(GND)	C2P	C2N	C1P	C1N	VBAT	NC	VSS	VDD	BS0
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	BS1	BS2	CS#	RES#	D/C#	R/W#	E/RD#	D0	D1	D2
PIN NO	21	22	23	24	25	26	27	28	29	30
SYMBOL	D3	D4	D5	D6	D7	IREF	VCOMH	VCC	VLSS	NC(GND)