



EXTERNAL DIMENSION

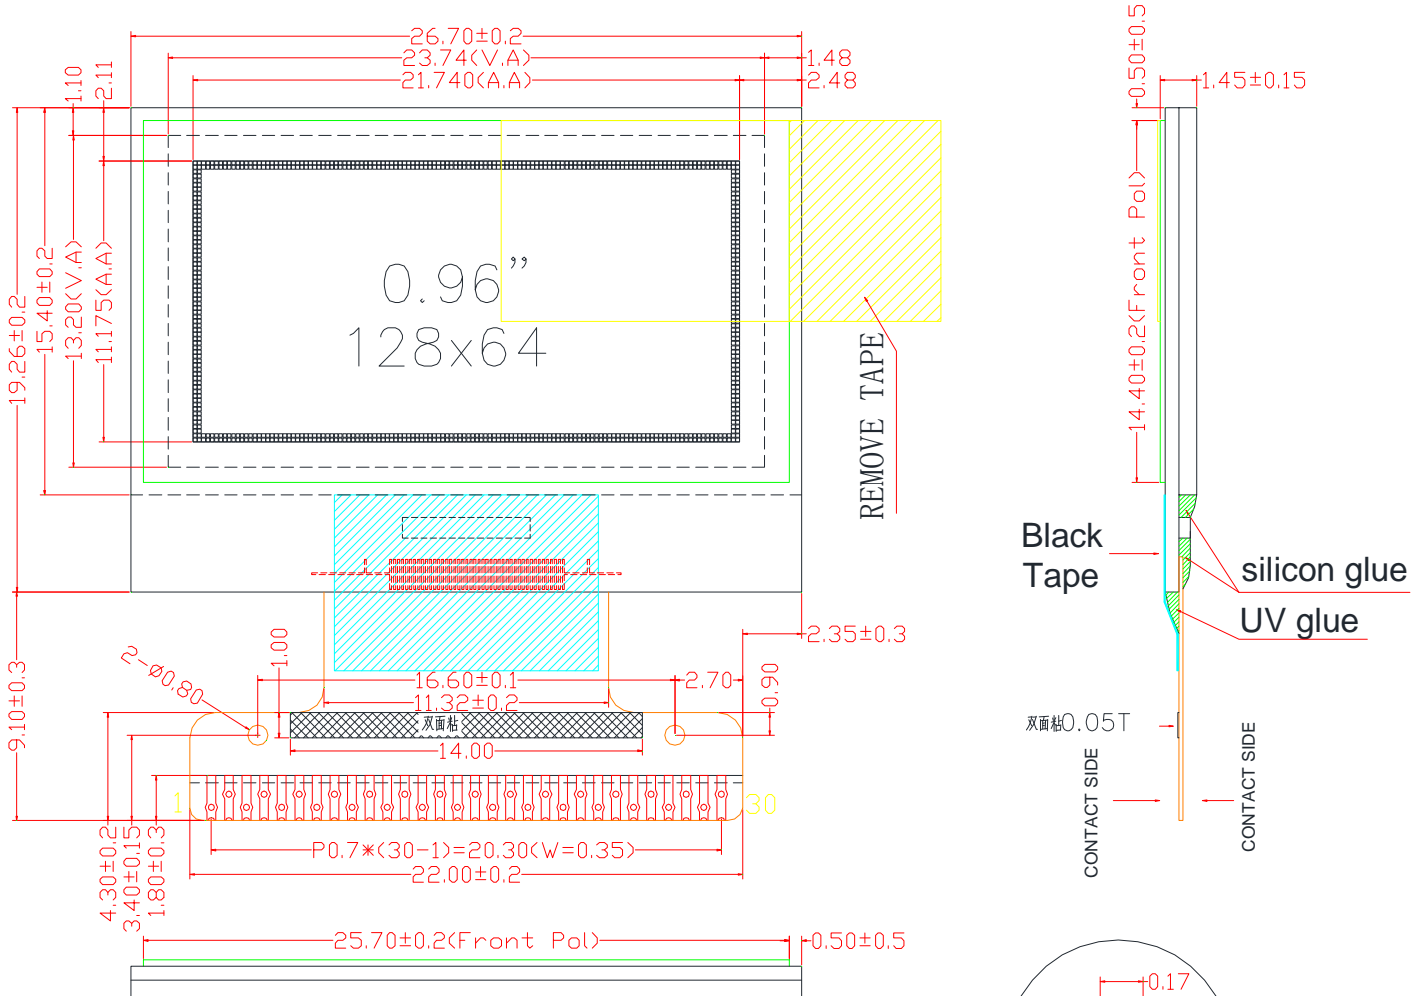

NOTES:

1. OPERATING TEMP:-20°C TO 70°C
2. STORAGE TEMP: -30°C TO 80°C
3. VIEWING DIRECTION:ALL
4. OLED DRIVE IC:SH1106G
5. DISPLAY COLOR: Blue / Green / Red / White / Yellow
6. UNSPECIFIED TOLERANCES: ±0.2mm.
7. () MEANS: DIMENSION FOR REFERENCE
8. THE PROTECTIVE FILMS ON BOTH SIDES OF OLED MUST BE REMOVED BEFORE ASSEMBLY BY CUSTOMER



Dots Detail
Scale 10X

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	NC	C2P	C2N	C1P	C1N	VBAT	NC	GND	VDD	IM0
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	IM1	IM2	CS#	RES#	A0	WR#	RD#	D0	D1	D2
PIN NO	21	22	23	24	25	26	27	28	29	30
SYMBOL	D3	D4	D5	D6	D7	IREF	VOMH	VPP	GND	NC