



PTOG1206□-B0 SERIES (128 * 64 DOTS)



龐誼科技股份有限公司
Palm Technology Co., Ltd.

EXTERNAL DIMENSION

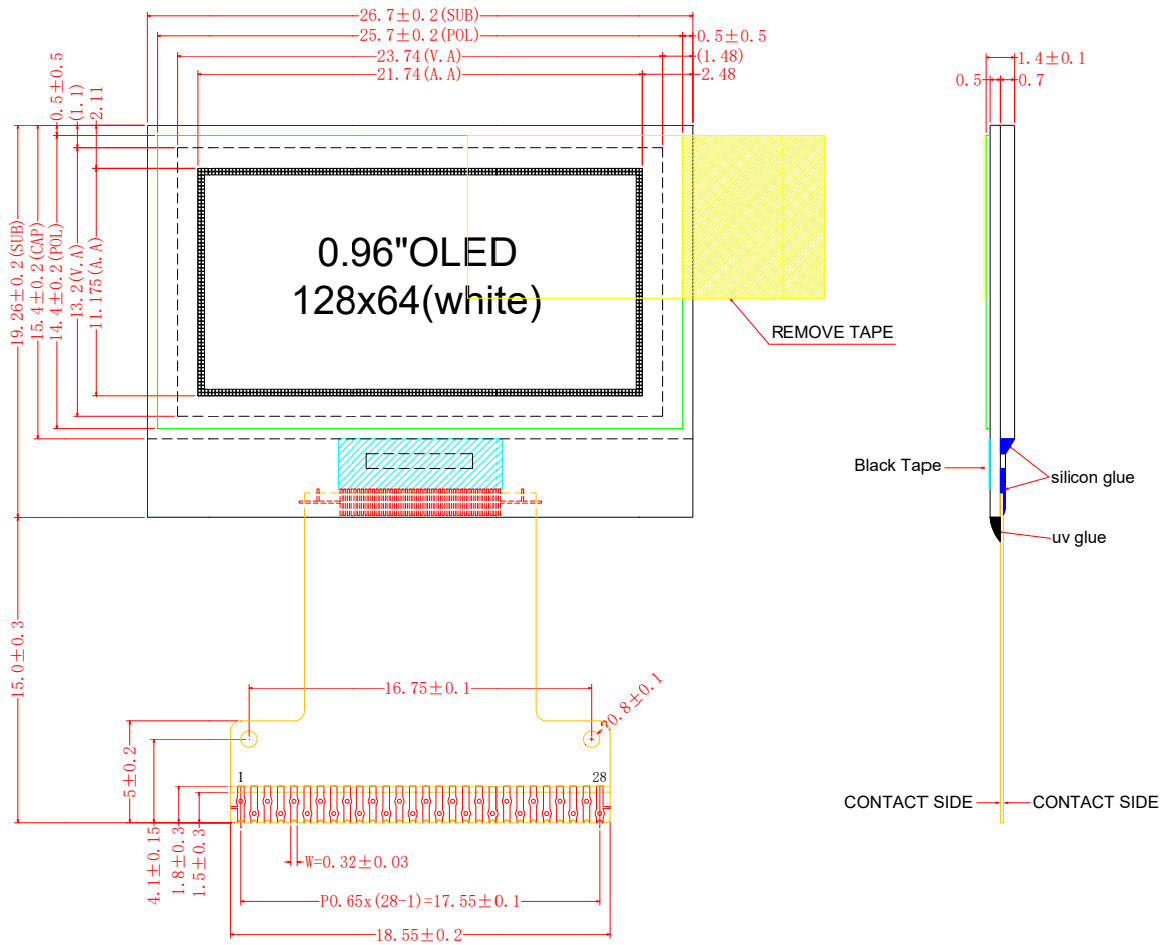

NOTES:

1. OPERATING TEMP:-30°C TO 80°C
2. STORAGE TEMP: -40°C TO 85°C
3. VIEWING DIRECTION:ALL
4. OLED DRIVE IC:SSD1315Z
5. DISPLAY COLOR:WHITE
6. UNSPECIFIED TOLERANCES: ±0.2mm.
7. () MEANS: DIMENSION FOR REFERENCE
8. THE PROTECTIVE FILM ON THE FRONT SIDE OF OLED MUST BE REMOVED BEFORE ASSEMBLY BY CUSTOMER

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	NC	C2P	C2N	C1P	C1N	VBAT	VSS	VDD	BS2	BS1
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	CS#	RES#	D/C#	R/W#	E/RD#	D0	D1	D2	D3	D4
PIN NO	21	22	23	24	25	26	27	28		
SYMBOL	D5	D6	D7	IREF	VCOMH	VCC	VLSS	NC		