



# PTOG1206□-B2 SERIES (128 \* 64 DOTS)




龐誼科技股份有限公司  
Palm Technology Co., Ltd.

## EXTERNAL DIMENSION

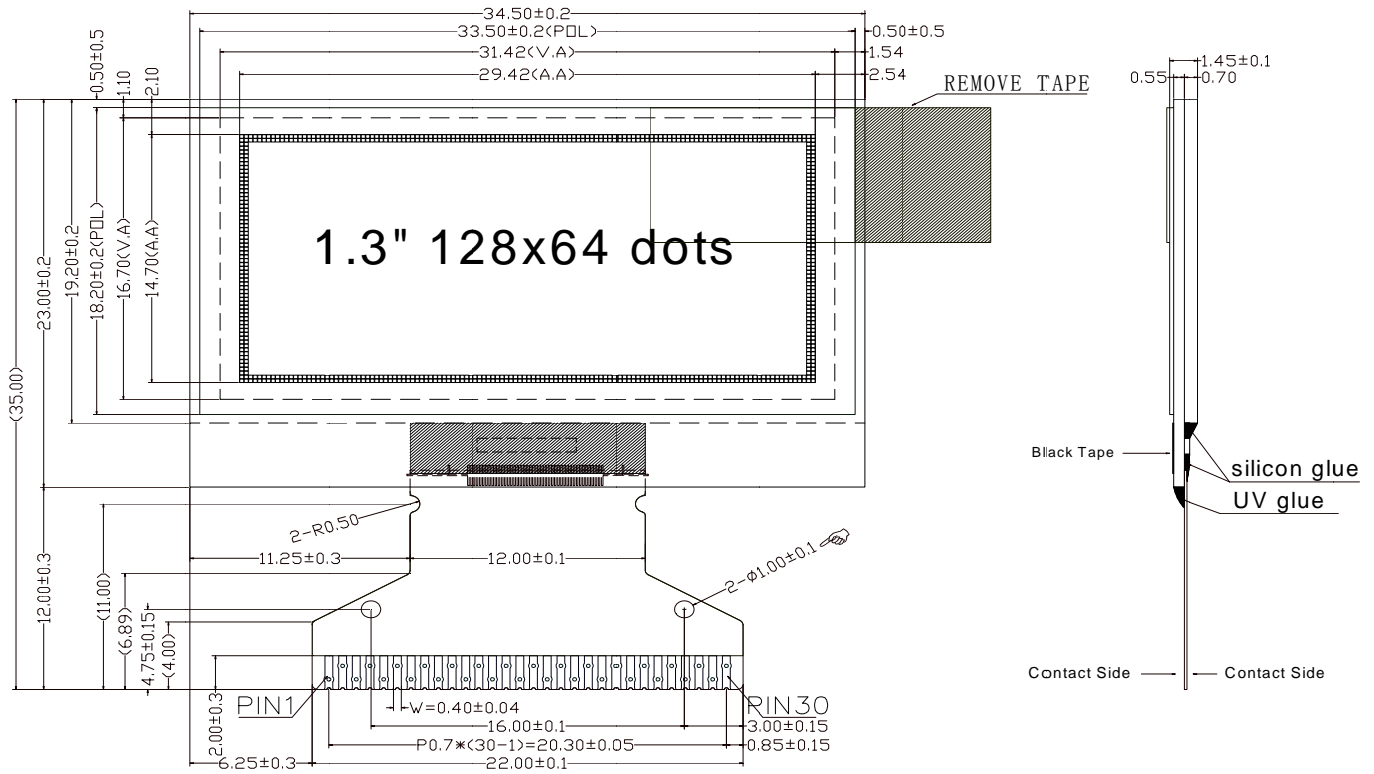


### NOTES:

1. OPERATING TEMP:-40°C TO 70°C
2. STORAGE TEMP: -40°C TO 85°C
3. VIEWING DIRECTION:ALL
4. OLED DRIVE IC:CH1116G
5. DISPLAY COLOR: WHITE
6. UNSPECIFIED TOLERANCES: ±0.2mm.
7. ( ) MEANS: DIMENSION FOR REFERENCE
8. THE PROTECTIVE FILMS ON FRONT SIDE OF OLED MUST BE REMOVED BEFORE ASSEMBLY BY CUSTOMER



Dots Detail  
Scale 10X



SEG & COM Layout

## PIN CONNECTIONS

<b>PIN NO</b>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>	<b>10</b>
<b>SYMBOL</b>	<b>NC(GND)</b>	<b>C1N</b>	<b>C1P</b>	<b>C2P</b>	<b>C2N</b>	<b>VDD2</b>	<b>NC</b>	<b>VSS</b>	<b>VDD1</b>	<b>IM0</b>
<b>PIN NO</b>	<b>11</b>	<b>12</b>	<b>13</b>	<b>14</b>	<b>15</b>	<b>16</b>	<b>17</b>	<b>18</b>	<b>19</b>	<b>20</b>
<b>SYMBOL</b>	<b>IM1</b>	<b>IM2</b>	<b>CSB</b>	<b>RESB</b>	<b>A0</b>	<b>WRB</b>	<b>RDB</b>	<b>D0</b>	<b>D1</b>	<b>D2</b>
<b>PIN NO</b>	<b>21</b>	<b>22</b>	<b>23</b>	<b>24</b>	<b>25</b>	<b>26</b>	<b>27</b>	<b>28</b>	<b>29</b>	
<b>SYMBOL</b>	<b>D3</b>	<b>D4</b>	<b>D5</b>	<b>D6</b>	<b>D7</b>	<b>IREF</b>	<b>VCOMH</b>	<b>VPP</b>	<b>VLSS</b>	