



# PTOG1206□-B4 SERIES (128 \* 64 DOTS)




龐誼科技股份有限公司  
Palm Technology Co., Ltd.

## EXTERNAL DIMENSION

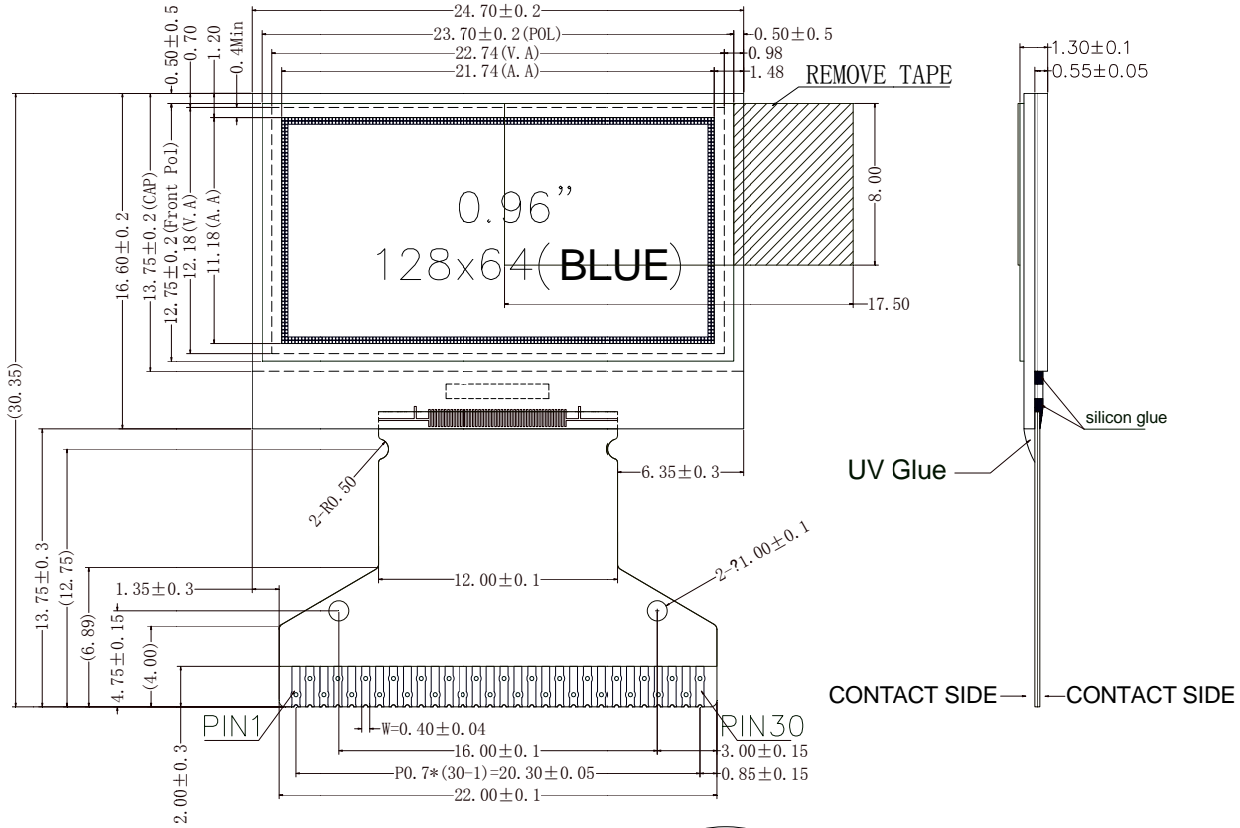


### NOTES:

1. OPERATING TEMP: -40°C TO 70°C
2. STORAGE TEMP: -40°C TO 85°C
3. VIEWING DIRECTION: ALL
4. OLED DRIVE IC: SSD1315Z
5. DISPLAY COLOR: BLUE
6. DUTY: 1/64
7. ( ) MEANS: DIMENSION FOR REFERENCE
8. THE PROTECTIVE FILM ON FRONT SIDE OF OLED MUST BE REMOVED BEFORE ASSEMBLY BY CUSTOMER



Dots Detail  
Scale 10X

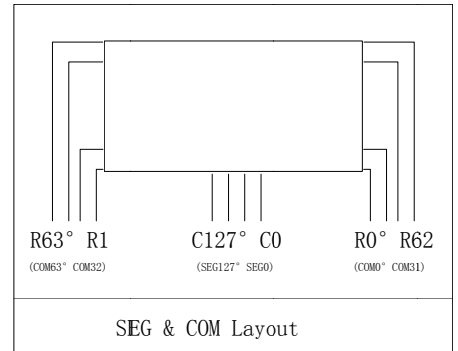

## PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	NC	C1N	C1P	C2P	C2N	VBAT	NC	VSS	VDD	NC
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	BS1	BS2	CS	RES	A0	WR	RD	D0	D1	D2
PIN NO	21	22	23	24	25	26	27	28	29	30
SYMBOL	D3	D4	D5	D6	D7	IREF	VCOMH	VCC	NC	NC