



EXTERNAL DIMENSION

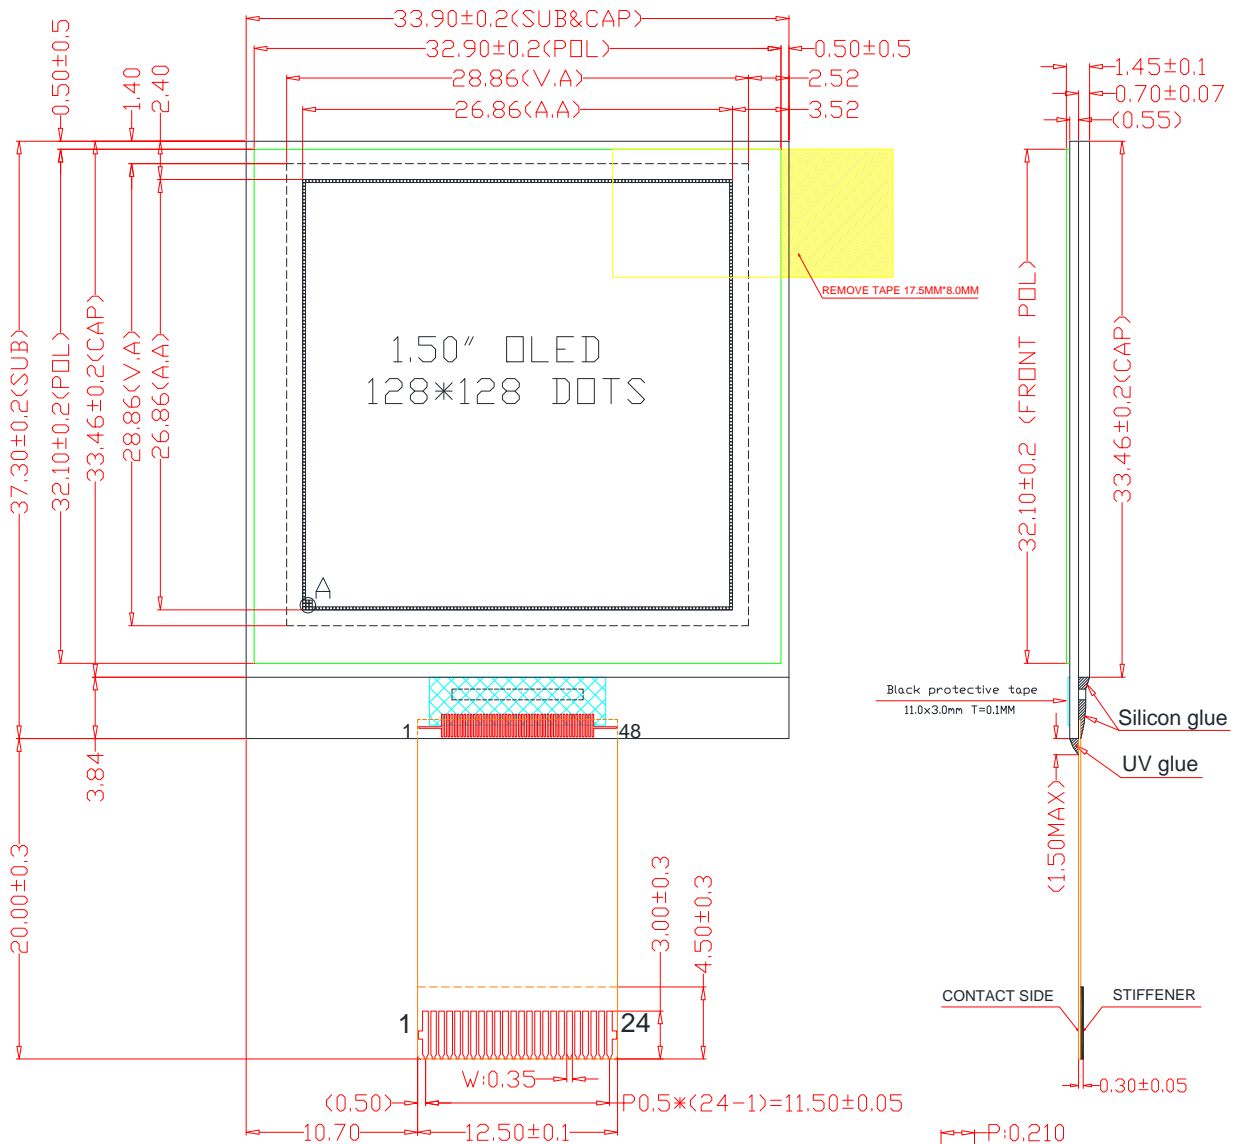

- NOTES:
1. OPERATING TEMP: -30°C TO 80°C
 2. STORAGE TEMP: -40°C TO 85°C
 3. VIEWING DIRECTION: ALL
 4. OLED DRIVE IC: SH1107
 5. DISPLAY COLOR: Blue / Green / Red / White / Yellow
 6. UNSPECIFIED TOLERANCES: ±0.2mm.
 7. () MEANS: DIMENSION FOR REFERENCE
 8. THE PROTECTIVE FILM ON FRONT SIDE OF OLED MUST BE REMOVED BEFORE ASSEMBLY BY CUSTOMER



"A"---Dots Detail scale 10X

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8
SYMBOL	NC	VSS	VSS	NC	VDD	IM1	IM2	CSB
PIN NO	9	10	11	12	13	14	15	16
SYMBOL	RESB	A0	WRB	RDB	D0	D1	D2	D3
PIN NO	17	18	19	20	21	22	23	24
SYMBOL	D4	D5	D6	D7	IREF	VCOMH	VPP	VSS