



EXTERNAL DIMENSION

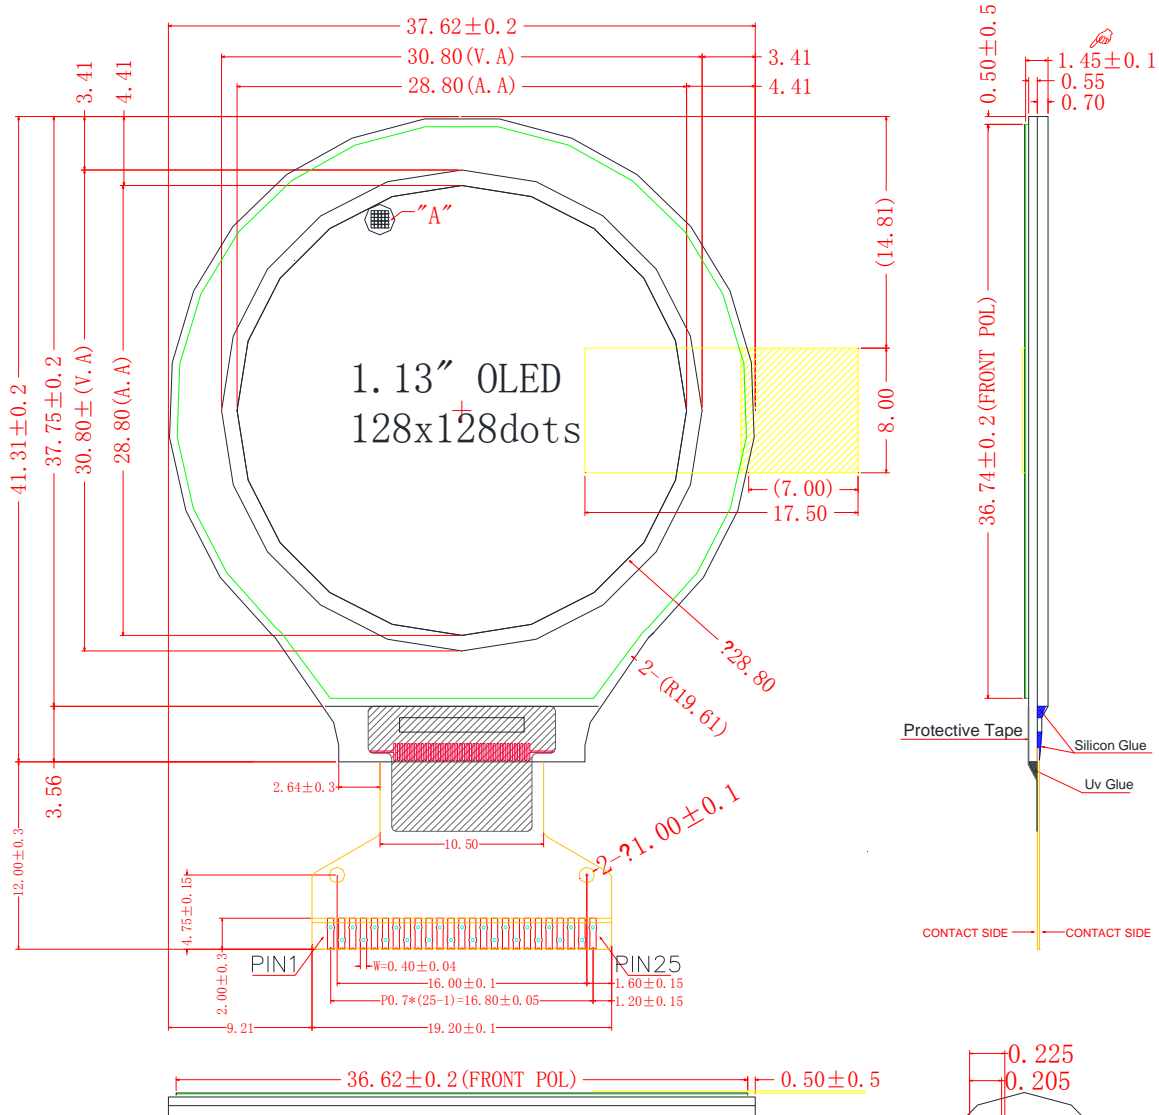

- NOTES:
1. OPERATING TEMP: -30°C TO 70 °C
 2. STORAGE TEMP: -40°C TO 80 °C
 3. VIEWING DIRECTION:ALL
 4. OLED DRIVE IC: SSD1327
 5. DISPLAY COLOR: Blue / Green / Red / White / Yellow
 6. UNSPECIFIED TOLERANCES: ±0.2mm.
 7. () MEANS: DIMENSION FOR REFERENCE
 8. THE PROTECTIVE FILM ON FRONT SIDE OF OLED MUST BE REMOVED BEFORE ASSEMBLY BY CUSTOMER



PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9
SYMBOL	NC	VSS	VCI	VDD	BS1	BS2	IREF	NC	CS#
PIN NO	10	11	12	13	14	15	16	17	18
SYMBOL	RES#	D/C#	WR#	RD#	D0	D1	D2	D3	D4
PIN NO	19	20	21	22	23	24	25		
SYMBOL	D5	D6	D7	VCOMH	VCC	VSS	NC		