


PTOG1616□-A0 SERIES (160 * 160 DOTS)




龐誼科技股份有限公司
Palm Technology Co., Ltd.

EXTERNAL DIMENSION

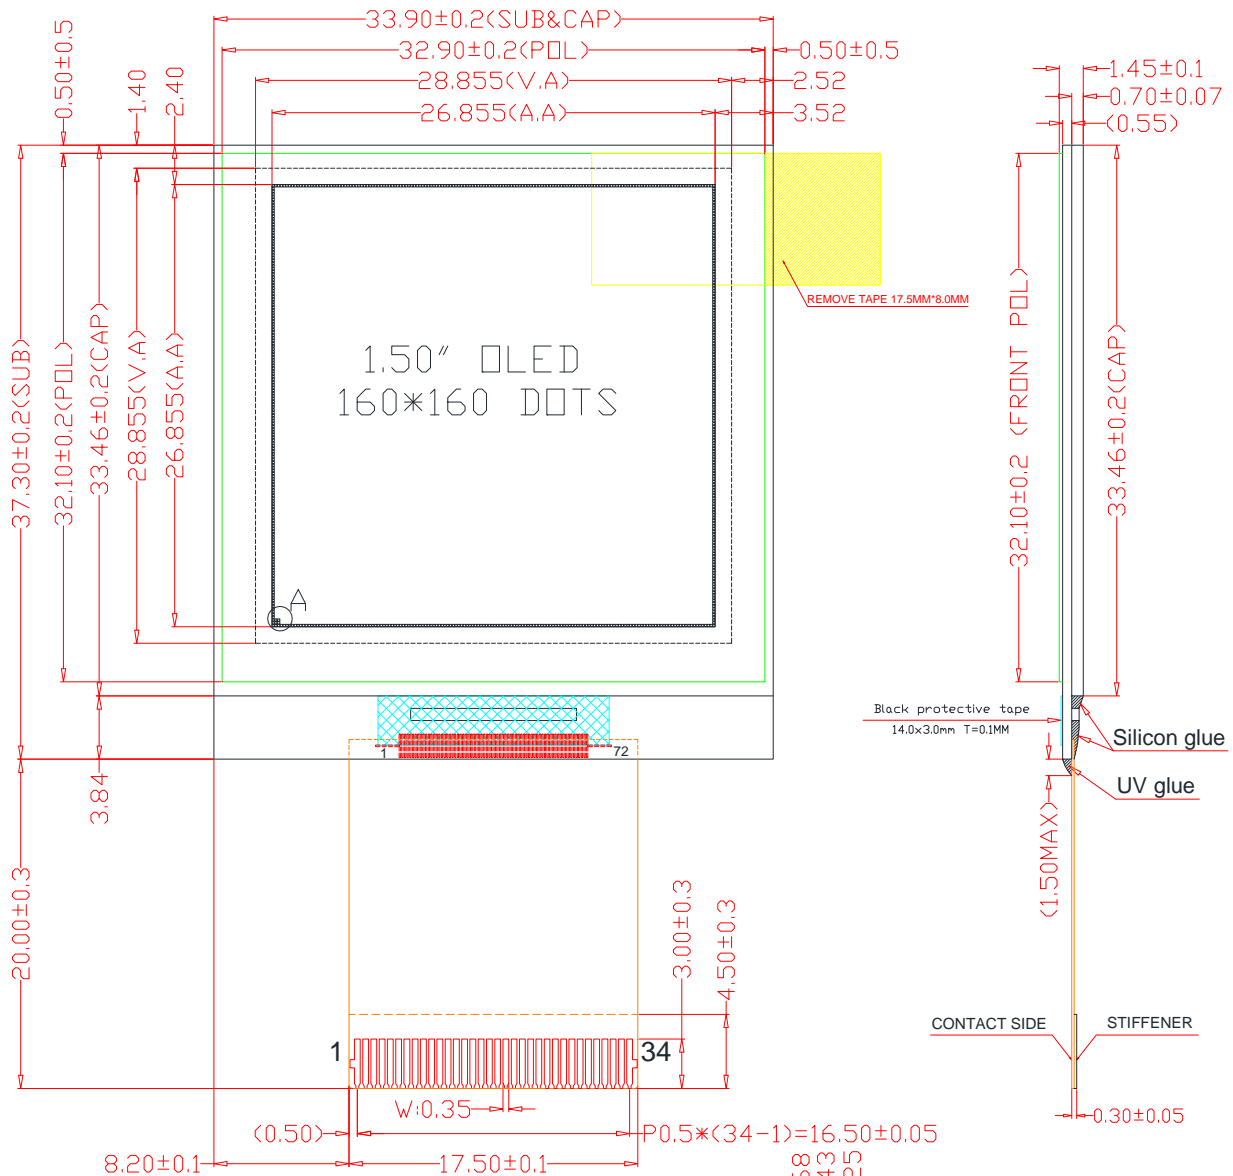

- NOTES:
1. OPERATING TEMP:-30°C TO 80°C
 2. STORAGE TEMP: -40°C TO 85°C
 3. VIEWING DIRECTION:ALL
 4. OLED DRIVE IC:SH1108
 5. DISPLAY COLOR:Blue / Green / Red / White / Yellow
 6. UNSPECIFIED TOLERANCES: ±0.2mm.
 7. () MEANS: DIMENSION FOR REFERENCE
 8. THE PROTECTIVE FILM ON FRONT SIDE OF OLED MUST BE REMOVED BEFORE ASSEMBLY BY CUSTOMER

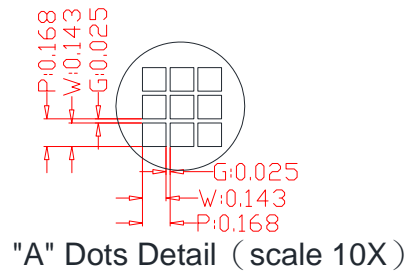

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9
SYMBOL	GND	VPP	VSEGM	VCOMH	VSL	VPP	IREF	VPP	GND
PIN NO	10	11	12	13	14	15	16	17	18
SYMBOL	VCL	SENSE	AVDD	FB	VBREF	SW	VDD	IM0	IM1
PIN NO	19	20	21	22	23	24	25	26	27
SYMBOL	VDD	IM2	/CS	RES	A0	WR	/RD	D0	D1
PIN NO	28	29	30	31	32	33	34		
SYMBOL	D2	D3	D4	D5	D6	D7	VPP		