


# PTOG1616□-A1 SERIES (160 \* 160 DOTS)



龐誼科技股份有限公司

Palm Technology Co., Ltd.

## EXTERNAL DIMENSION

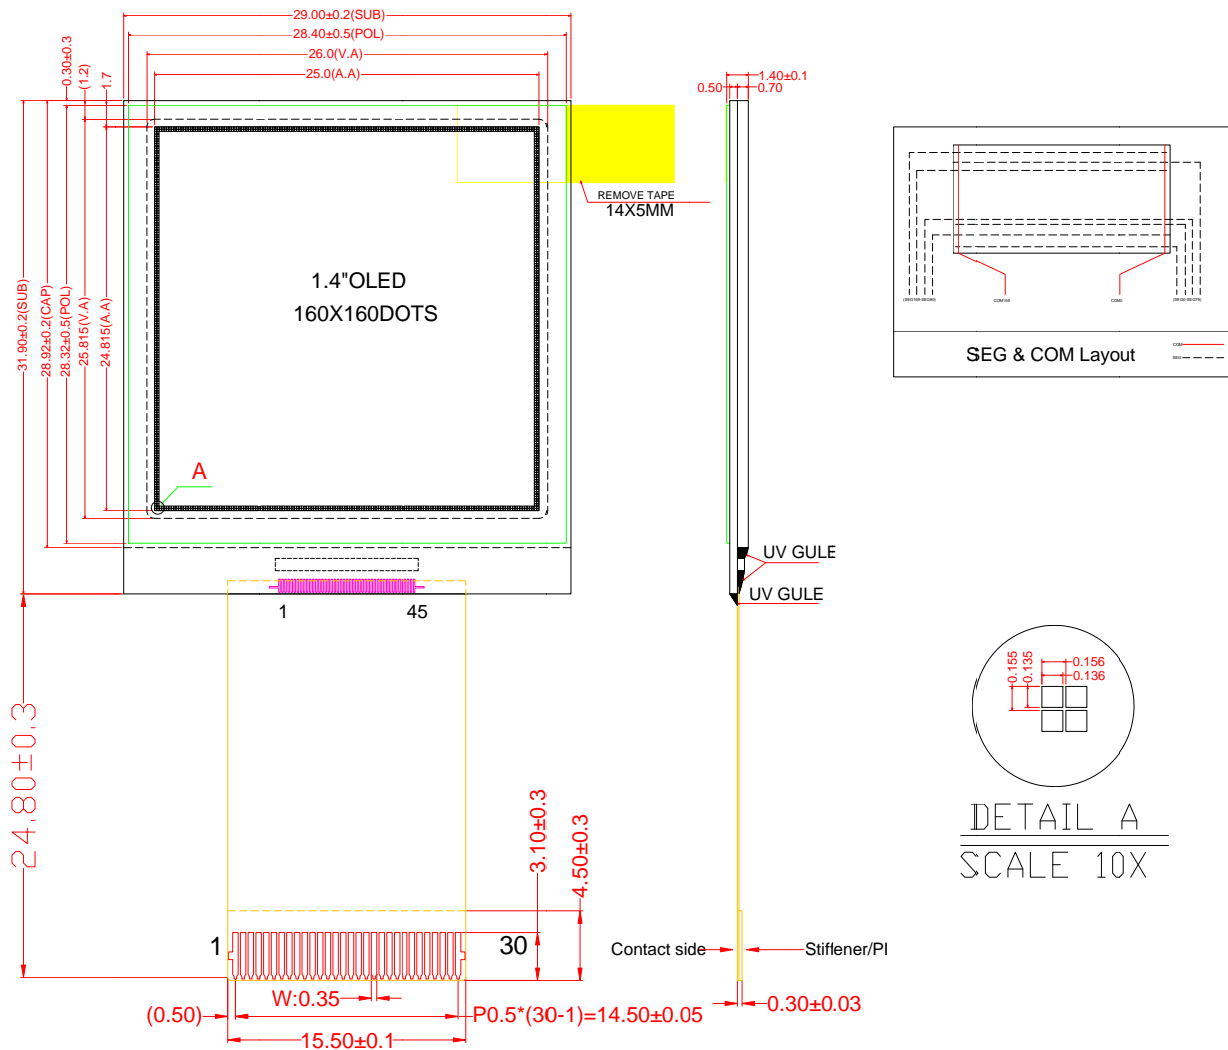

- NOTES:
1. OPERATING TEMP:-30°C TO 80°C
  2. STORAGE TEMP: -40°C TO 85°C
  3. VIEWING DIRECTION:ALL
  4. OLED DRIVE IC:**SSD1320Z**
  5. DISPLAY COLOR:White
  6. UNSPECIFIED TOLERANCES: ±0.2mm.
  7. ( ) MEANS: DIMENSION FOR REFERENCE
  8. THE PROTECTIVE FILM ON FRONT SIDE OF OLED MUST BE REMOVED BEFORE ASSEMBLY BY CUSTOMER

## PIN CONNECTIONS

<b>PIN NO</b>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>	<b>10</b>
<b>SYMBOL</b>	<b>GND</b>	<b>TP-SCL</b>	<b>TP-SDA</b>	<b>TP-RES</b>	<b>TP-INT</b>	<b>VDD(3.3V)</b>	<b>VSS</b>	<b>VCC</b>	<b>VCOM</b>	<b>VDD</b>
<b>PIN NO</b>	<b>11</b>	<b>12</b>	<b>13</b>	<b>14</b>	<b>15</b>	<b>16</b>	<b>17</b>	<b>18</b>	<b>19</b>	<b>20</b>
<b>SYMBOL</b>	<b>VLSS</b>	<b>CS#</b>	<b>RST#</b>	<b>D/C#</b>	<b>R/W# (WR#)</b>	<b>E (RD#)</b>	<b>D0</b>	<b>D1</b>	<b>D2</b>	<b>D3</b>
<b>PIN NO</b>	<b>21</b>	<b>22</b>	<b>23</b>	<b>24</b>	<b>25</b>	<b>26</b>	<b>27</b>	<b>28</b>	<b>29</b>	<b>30</b>
<b>SYMBOL</b>	<b>D4</b>	<b>D5</b>	<b>D6</b>	<b>D7</b>	<b>BS0</b>	<b>BS1</b>	<b>BS2</b>	<b>VSL</b>	<b>IREF</b>	<b>NC</b>