


# PTOG2412□-A0 SERIES (240 \* 128 DOTS)




龐誼科技股份有限公司  
Palm Technology Co., Ltd.

## EXTERNAL DIMENSION

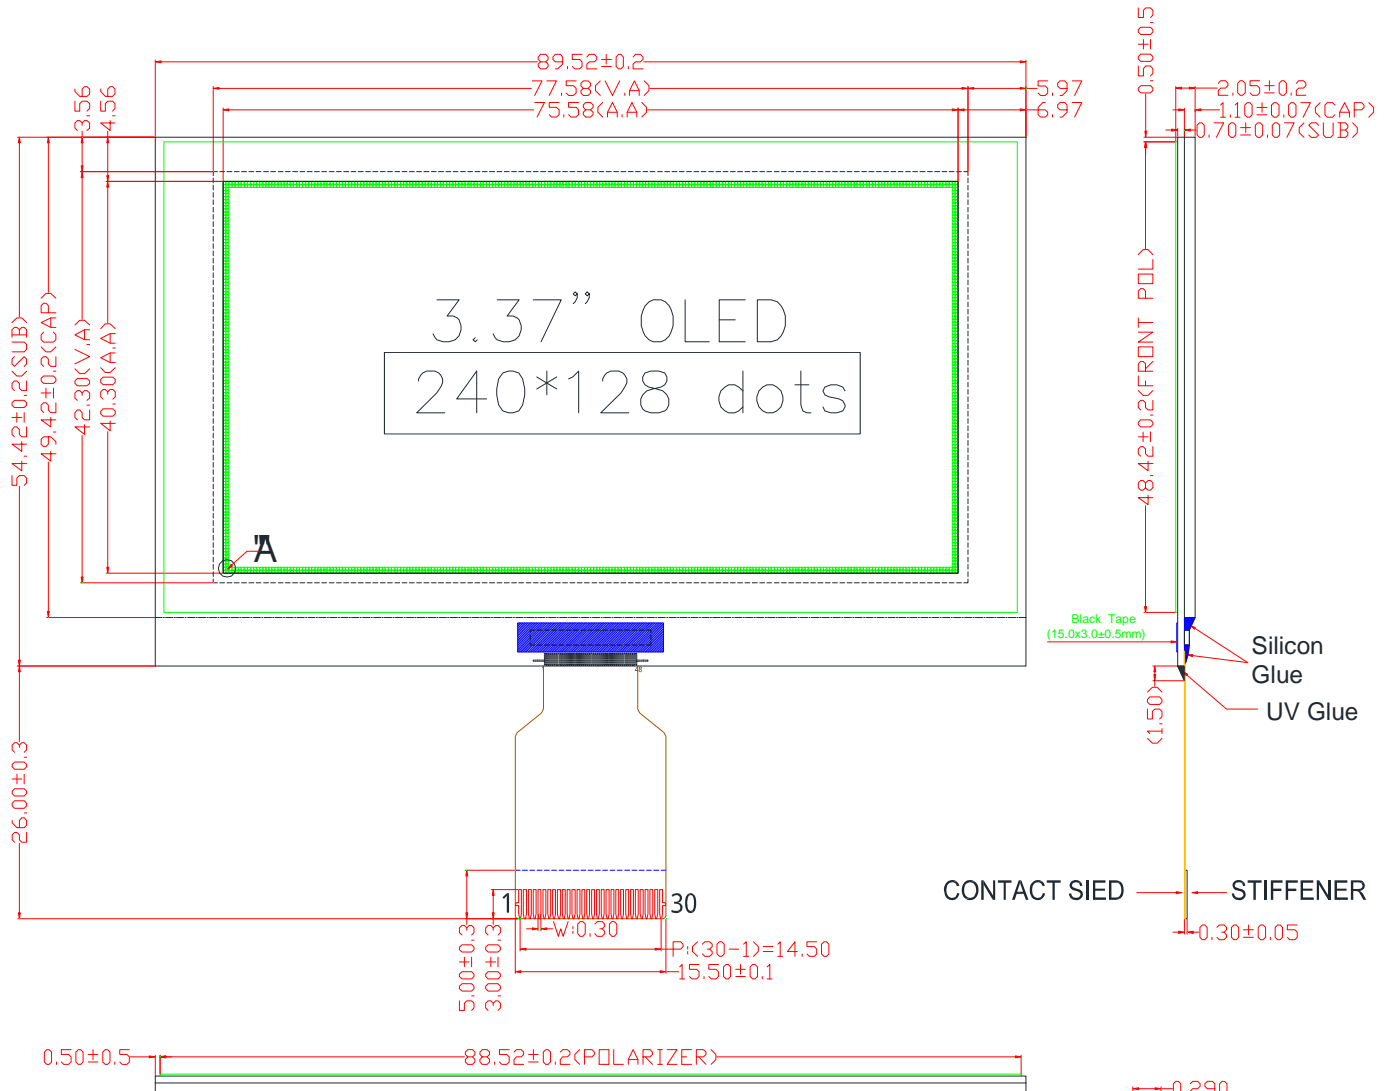

### NOTES:

1. OPERATING TEMP:-20°C TO 70°C
2. STORAGE TEMP: -30°C TO 80°C
3. VIEWING DIRECTION:ALL
4. OLED DRIVE IC:SSD1322
5. DISPLAY COLOR:Blue / Green / Red / White / Yellow
6. UNSPECIFIED TOLERANCES: ±0.2mm.
7. ( ) MEANS: DIMENSION FOR REFERENCE
8. THE PROTECTIVE FILM ON FRONT SIDE OF OLED MUST BE REMOVED BEFORE ASSEMBLY BY CUSTOMER



## PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	NC	VSS	VCC	VCOMH	VLSS	D7	D6	D5	D4	D3
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	D2	D1	D0	E	R/W#	BS0	BS1	D/C#	CS#	RES#
PIN NO	21	22	23	24	25	26	27	28	29	30
SYMBOL	FR	IREF	NC	VDDIO	VDD	VCI	VSL	VLSS	VCC	NC