


PTOG2506 -A0 SERIES

(256 * 64 DOTS)



龐誼科技股份有限公司
Palm Technology Co., Ltd.

EXTERNAL DIMENSION

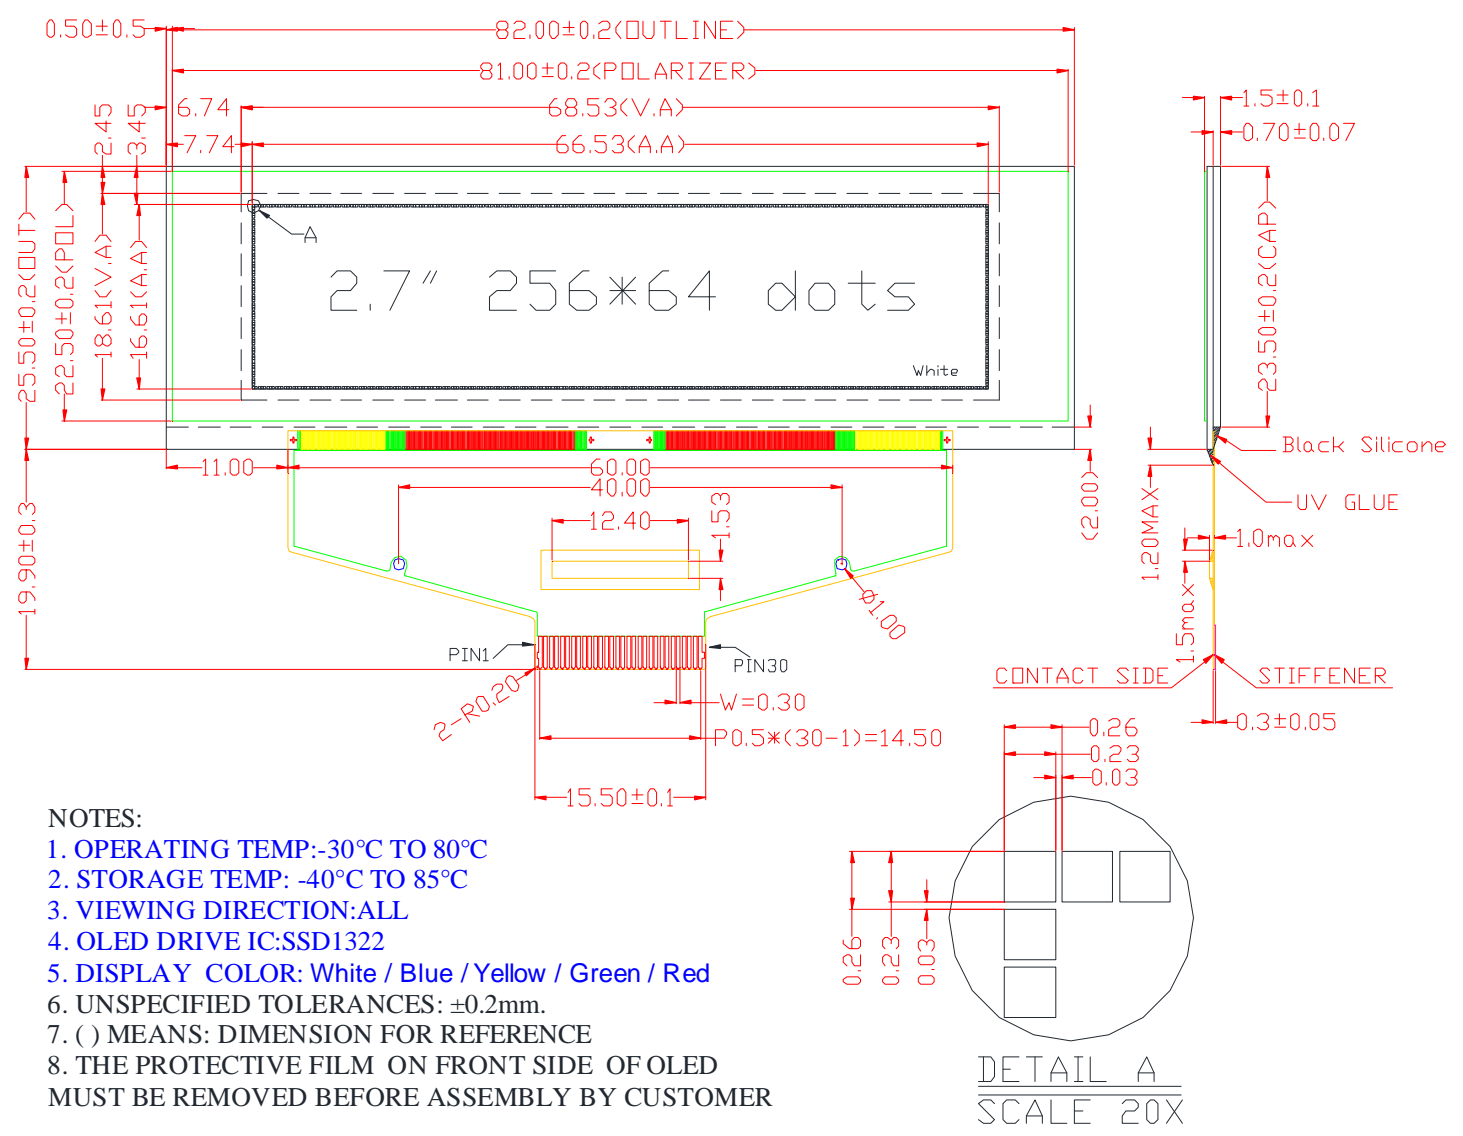

- NOTES:
1. OPERATING TEMP: -30°C TO 80°C
 2. STORAGE TEMP: -40°C TO 85°C
 3. VIEWING DIRECTION: ALL
 4. OLED DRIVE IC: SSD1322
 5. DISPLAY COLOR: White / Blue / Yellow / Green / Red
 6. UNSPECIFIED TOLERANCES: ±0.2mm.
 7. () MEANS: DIMENSION FOR REFERENCE
 8. THE PROTECTIVE FILM ON FRONT SIDE OF OLED MUST BE REMOVED BEFORE ASSEMBLY BY CUSTOMER

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	NC	VSS	VCC	VCOMH	VLSS	D7	D6	D5	D4	D3
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	D2	D1	D0	E	R/W#	BS2	BS1	D/C#	CS#	RES#
PIN NO	21	22	23	24	25	26	27	28	29	30
SYMBOL	FR	IREF	NC	VDDIO	VDD	VCI	VSL	VLSS	VCC	NC