


PTOG2506 -A2 SERIES

(256 * 64 DOTS)




龐誼科技股份有限公司
Palm Technology Co., Ltd.

EXTERNAL DIMENSION

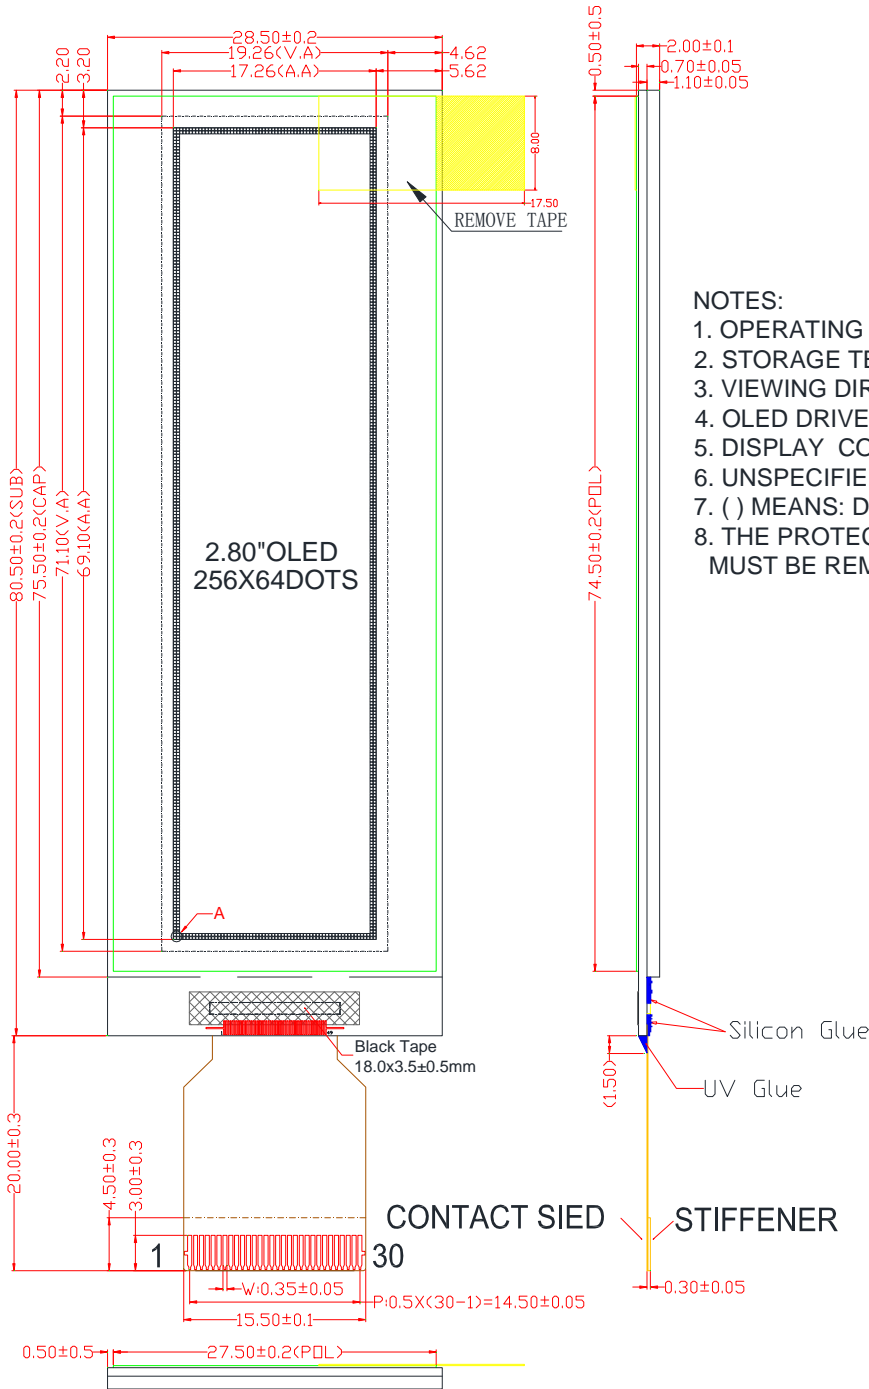

NOTES:

1. OPERATING TEMP: -30°C TO 80°C
2. STORAGE TEMP: -40°C TO 85°C
3. VIEWING DIRECTION: ALL
4. OLED DRIVE IC: SSD1362Z
5. DISPLAY COLOR: Blue / Green / Red / White / Yellow
6. UNSPECIFIED TOLERANCES: ±0.2mm.
7. () MEANS: DIMENSION FOR REFERENCE
8. THE PROTECTIVE FILM ON FRONT SIDE OF OLED MUST BE REMOVED BEFORE ASSEMBLY BY CUSTOMER



Dots Detail A
Scale 10X

PIN CONNECTIONS

| | | | | | | | | | |
|--------|------|-------|-------|-------|-------|------|------|-----|-----|
| PIN NO | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| SYMBOL | VSS | VPP | VSEGM | VCOMH | VSL | VREF | IREF | VPP | VSS |
| PIN NO | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 |
| SYMBOL | VCL | SENSE | AVDD | FB | VBREF | SW | VDD2 | IM0 | IM1 |
| PIN NO | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 |
| SYMBOL | VDD1 | IM2 | /CS | /RES | A0 | WR | RD | D0 | D1 |
| PIN NO | 28 | 29 | 30 | 31 | 32 | 33 | 34 | | |
| SYMBOL | D2 | D3 | D4 | D5 | D6 | D7 | VPP | | |