



PTOG2506 -A4 SERIES (256 * 64 DOTS)



龐誼科技股份有限公司

Palm Technology Co., Ltd.

EXTERNAL DIMENSION

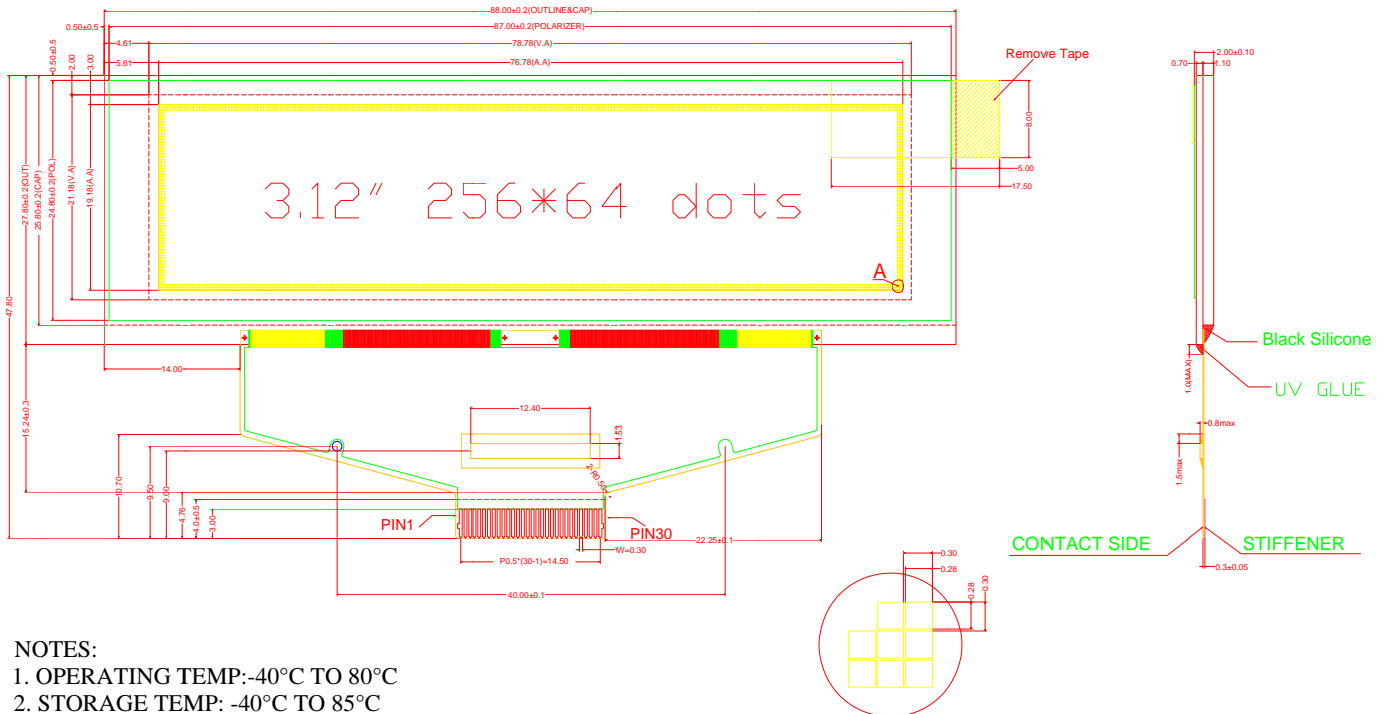

NOTES:

1. OPERATING TEMP:-40°C TO 80°C
2. STORAGE TEMP: -40°C TO 85°C
3. VIEWING DIRECTION:ALL
4. OLED DRIVE IC:SSD1322UR1
5. DISPLAY COLOR:YELLOW
6. UNSPECIFIED TOLERANCES: $\pm 0.2\text{mm}$.
7. () MEANS: DIMENSION FOR REFERENCE
8. THE PROTECTIVE FILM ON FRONT SIDE OF OLED MUST BE REMOVED BEFORE ASSEMBLY BY CUSTOMER

DETAIL A
SCALE 10X

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	NC	VSS	VCC	VCOMH	VLSS	D7	D6	D5	D4	D3
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	D2	D1	D0	E	R/W#	BS0	BS1	DC#	CS#	RES#
PIN NO	21	22	23	24	25	26	27	28	29	30
SYMBOL	FR	IREF	NC	VDDIO	VDD	VCI	VSL	VLSS	VCC	NC