


# PHG12A06C SERIES (128 \* 64 DOTS)



龐誼科技股份有限公司

Palm Technology Co., Ltd.

## EXTERNAL DIMENSION

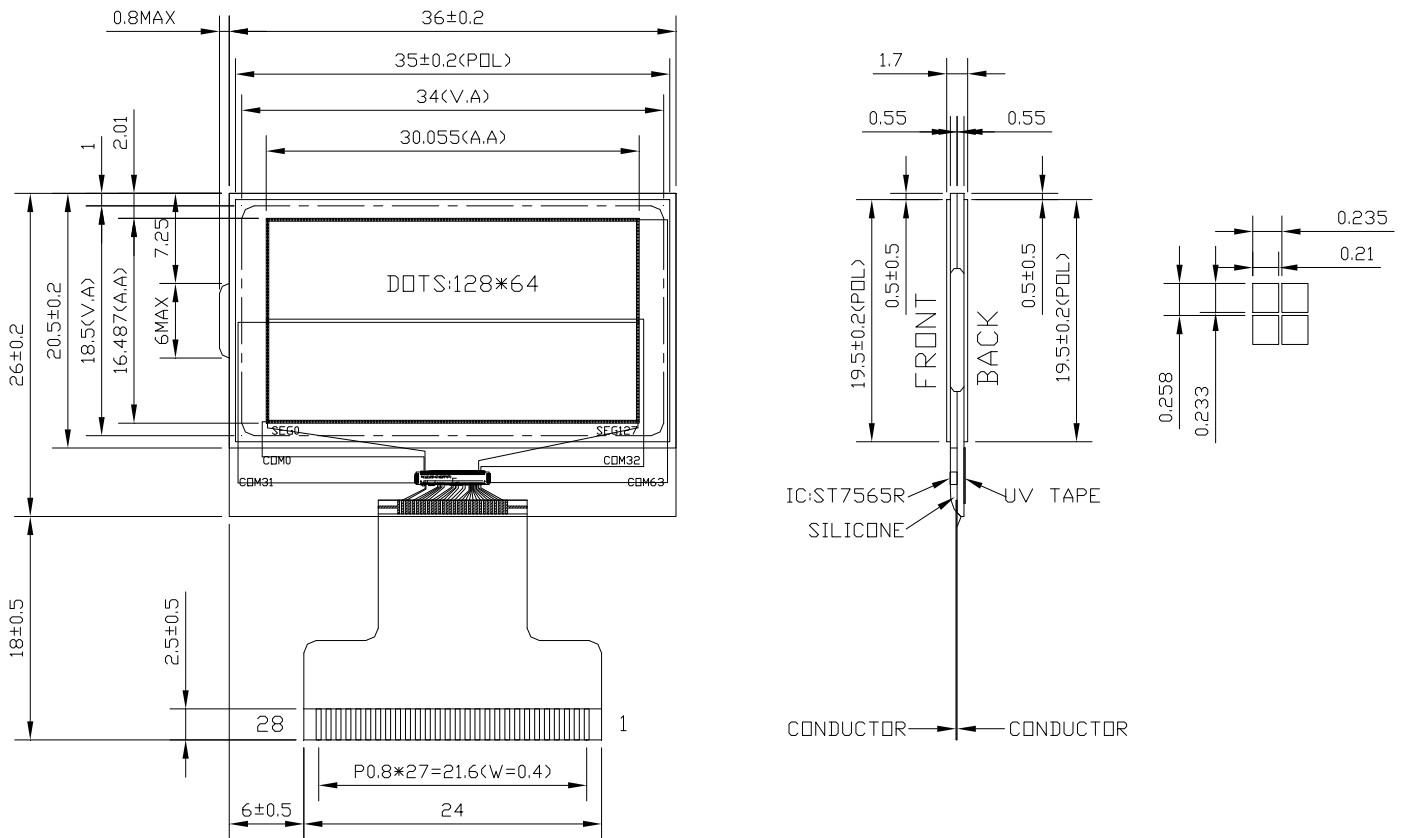

### NOTE:

- |   |                               |
|---|-------------------------------|
| 1 DISPLAY TYPE: FSTN                    | 6 OPERATING TEMP: 0°C ~ +50°C |
| 2 POLARIZER MODE: TRANFLECTIVE/POSITIVE | 7 STORAGE TEMP: -10°C ~ +60°C |
| 3 VIEWING DIRECTION: 6:00               | 8 DRIVE IC: ST7565R<COG>      |
| 4 DRIVE METHOD: 1/64 DUTY, 1/9 BIAS     | 9 CONNECTOR: FPC              |
| 5 OPERATING VOLTAGE: 10.0V              | 10 GENERAL TOLERANCE: ±0.2    |

## PIN CONNECTIONS

<i>PIN NO</i>	1	2	3	4	5	6~13		14	15
<i>SYMBOL</i>	/CS1	/RES	A0	R/W(WR)	E(RD)	D0~D7		VSS	VOUT
<i>PIN NO</i>	16	17	18	19	20	21~25	26	27	28
<i>SYMBOL</i>	C3P	C1N	C1P	C2P	C2N	V4~V0	NC	C68	VDD