



PHG1206B SERIES (128 * 64 DOTS)



龐誼科技股份有限公司

Palm Technology Co., Ltd.

EXTERNAL DIMENSION

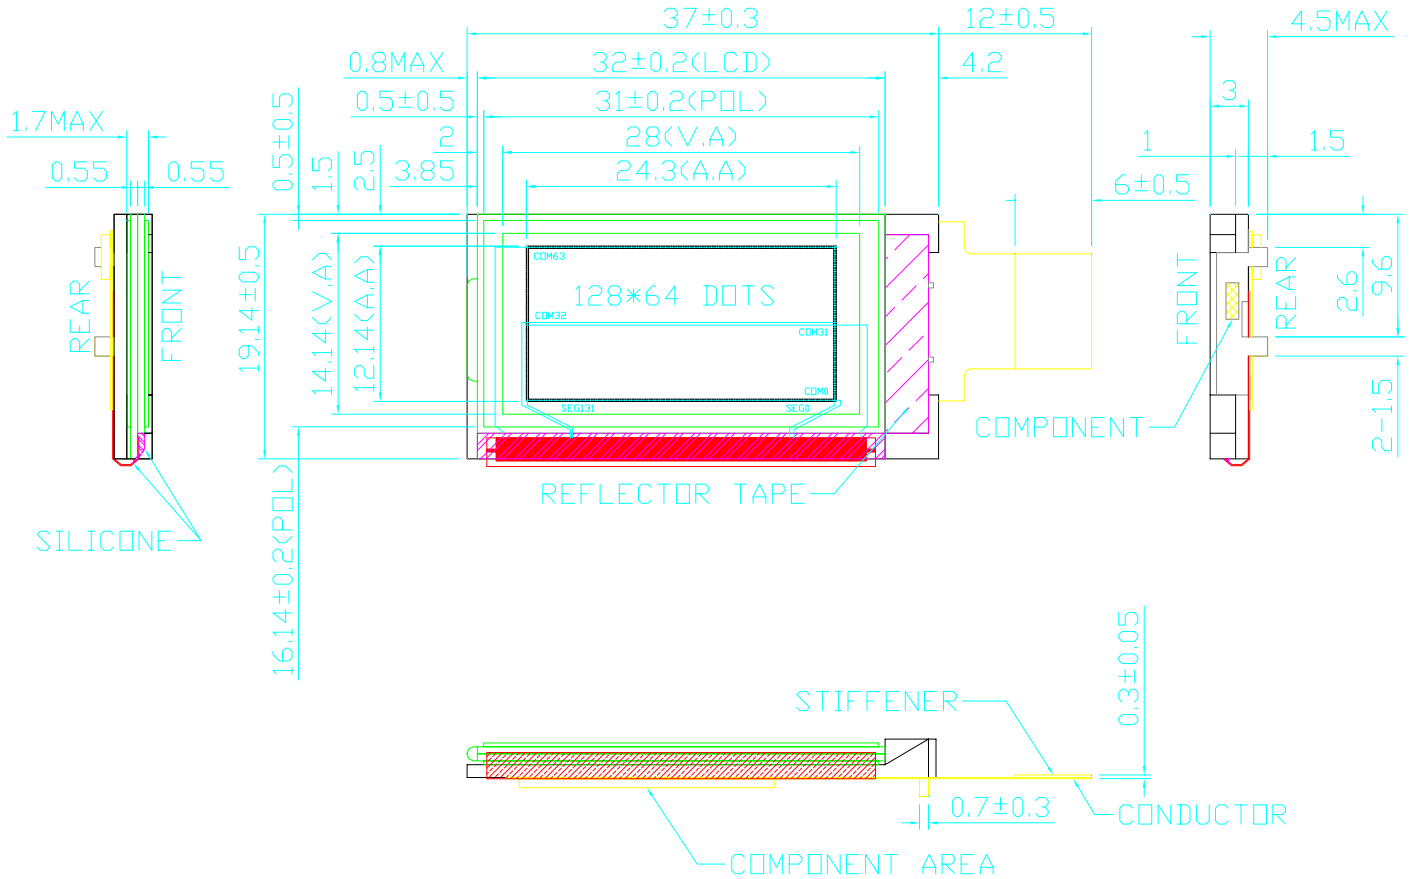

NOTE:

- 1 DISPLAY TYPE: FSTN
- 2 POLARIZER MODE: TRANSFLECTIVE/POSITIVE
- 3 VIEWING DIRECTION: 6:00
- 4 DRIVE METHOD: 1/65DUTY, 1/9BIAS
- 5 OPERATING VOLTAGE: 9.0V

- 6 OPERATING TEMP.: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
- 7 STORAGE TEMP.: $-30^{\circ}\text{C} \sim 80^{\circ}\text{C}$
- 8 Driver IC: S6B0723X01-03XNK(TAB)
- 9 BACKLIGHT: LED(YELLOW/GREEN)
- *General Tolerance: ± 0.2

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10
SYMBOL	VDD	VSS	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
PIN NO	11	12	13	14	15	16	17	18	19	20
SYMBOL	E/RD	/RW	RS	/RES	/CS1	LED A	LED K			