



PHG12061 E SERIES (128 * 64 DOTS)



魔誼科技股份有限公司
Palm Technology Co., Ltd

EXTERNAL DIMENSION

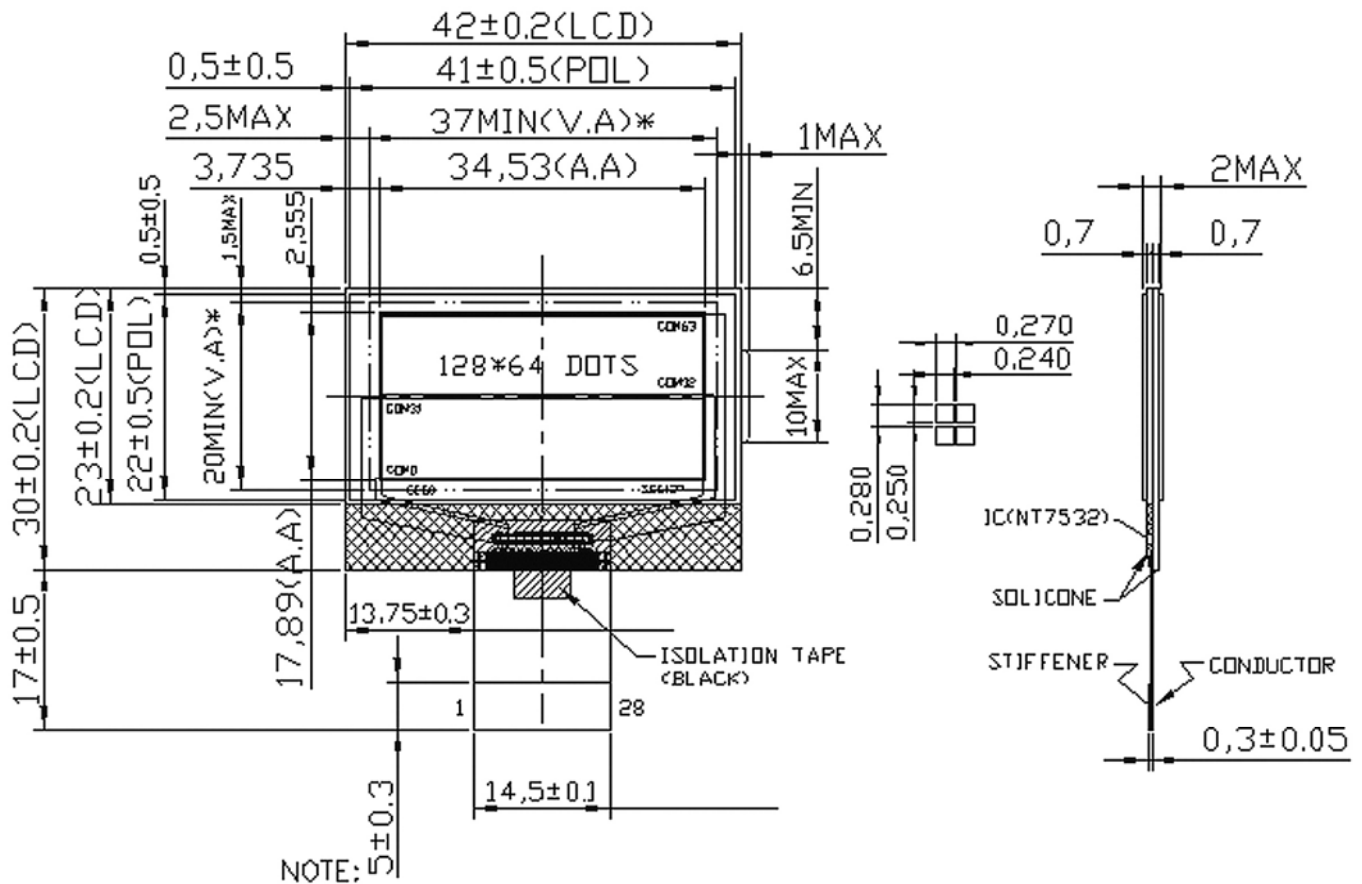

- 1 DISPLAY TYPE: FSTN
- 2 POLARIZER MODE: TRANSFLECTIVE/POSITIVE
- 3 VIEWING DIRECTION: 6:00
- 4 DRIVE METHOD: 1/65 DUTY, 1/6 BIAS
- 5 OPERATING VOLTAGE: 9.0V

- 6 OPERATING TEMP: -20°C ~ +70°C
- 7 STORAGE TEMP: -30°C ~ +80°C
- 8 DRIVE IC: NT7532(COG)
- 9 CONNECTOR: FPC
- 10 GENERAL TOLERANCE: ±0.2

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10	11	12	13	14
SYMBOL	VDD	C86	VR	V0	V4	V3	V2	V1	CAP2-	CAP2+	CAP1+	CAP1-	CAP3+	VOUT
PIN NO	15	16	17	18	19	20	21	22	23	24	25	26	27	28
SYMBOL	VSS	D7	D6	D5	D4	D3	D2	D1	D0	/RD	/WR	A0	/RST	/CS1