


PHG1612A SERIES (160 * 128 DOTS)



龐誼科技股份有限公司

Palm Technology Co., Ltd.

EXTERNAL DIMENSION

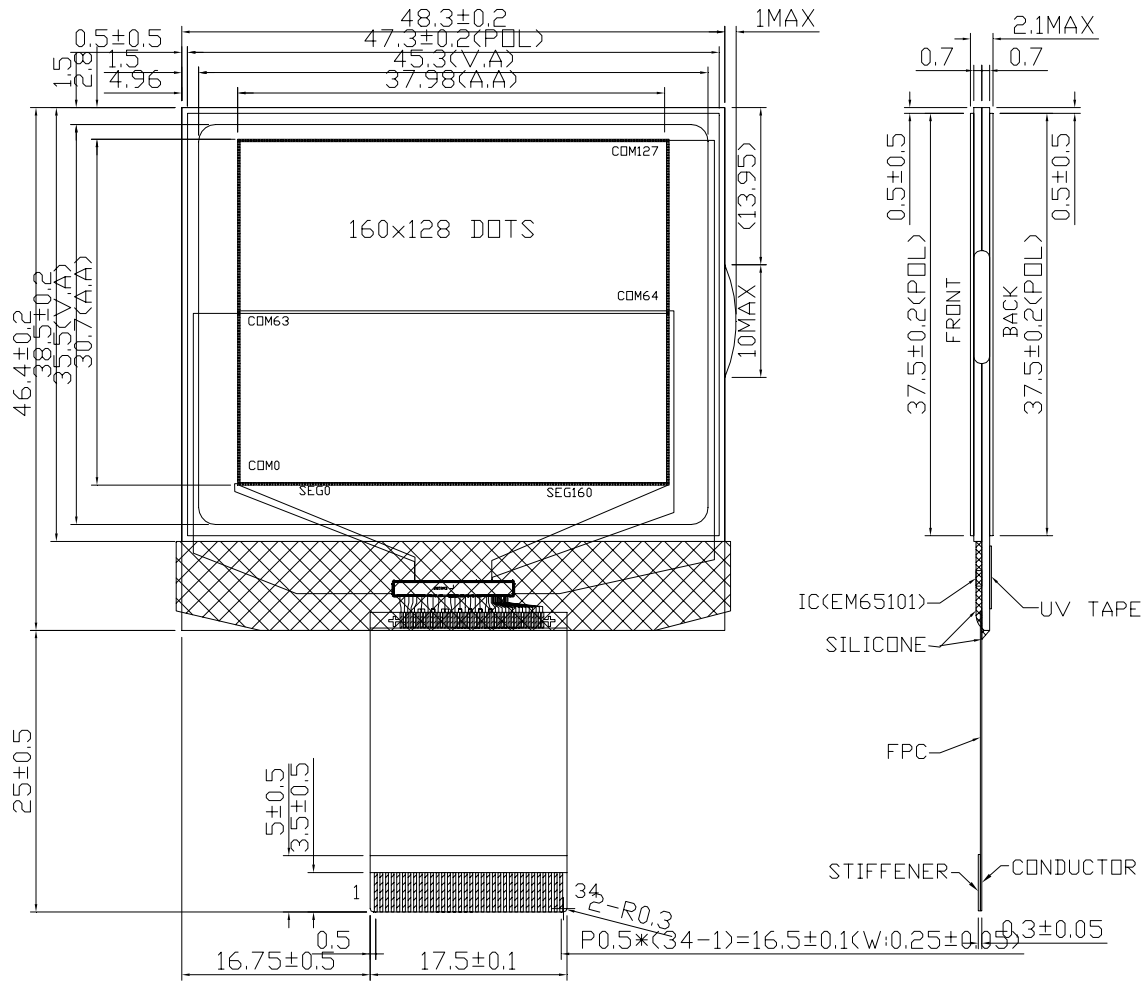

NOTE:

- 1 DISPLAY TYPE: FSTN
- 2 POLARIZER MODE: TRANFLECTIVE/POSITIVE
- 3 VIEWING DIRECTION: 6:00
- 4 DRIVE METHOD: 1/128 DUTY, 1/12 BIAS
- 5 OPERATING VOLTAGE: 12.5V

- 6 OPERATING TEMP: -20°C ~ +70°C
- 7 STORAGE TEMP: -30°C ~ +80°C
- 8 DRIVE IC: EM65101 (COG)
- 9 CONNECTOR: FPC
- 10 GENERAL TOLERANCE: ±0.2

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
SYMBOL	V0	V1	V2	V3	V4	VSS	V2X	CAP1+	CAP1-	VEE	CAP4+	CAP2+	CAP2-	CAP3-	CAP3+	CAP5+	VOUT
PIN NO	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34
SYMBOL	VREF	VDD	D7	D6	D5	D4	D3	D2	D1	D0	RDB	WRB	RS	RESB	CSB	M86	P/S