


PT0152424-A2 SERIES

(240*RGB*240 DOTS)




魔誼科技股份有限公司
Palm Technology Co., Ltd.

EXTERNAL DIMENSION

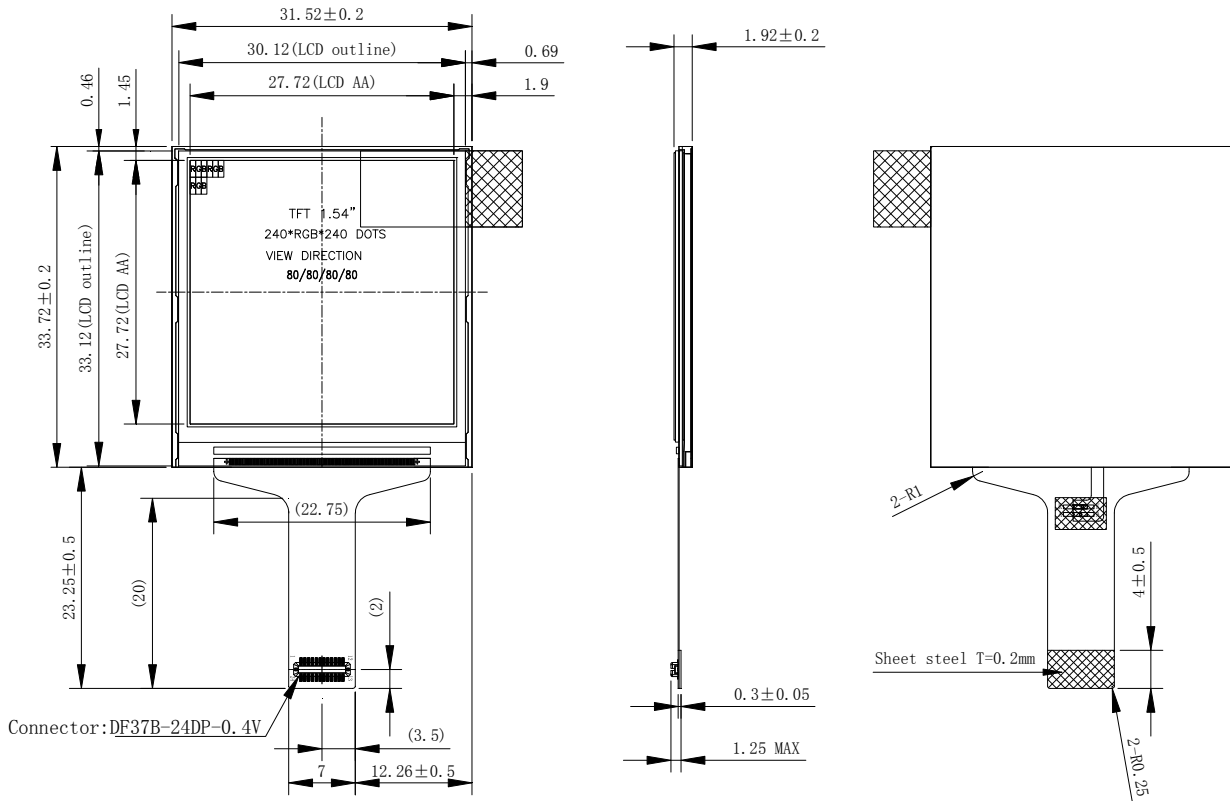

NOTES:

1. DISPLAY TYPE: 1.54" TFT
2. VIEWING DIRECTION: ALL
3. LCD DRIVE IC: ST7789V
4. POLARIZER MODE: TRANSMISSIVE/NEGATIVE
5. OPERATING TEMP: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
6. STORAGE TEMP: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$
7. UNMARKER TOLERANCE: ± 0.20
8. PROTECTION: RoHS



LED WHITE, 3 LED, 60mA, TPY: 3.2V

PIN CONNECTIONS

PIN NO	1	2	3	4	5	6	7	8
SYMBOL	LEDK	LEDK	GND	GND	FMARK	SDA	LSAO	SCL
PIN NO	9	10	11	12	13	14	15	16
SYMBOL	CS	RESET	IOVCC18	IOVCC18	VCC28	VCC28	GND	GND
PIN NO	17	18	19	20	21	22	23	24
SYMBOL	NC	NC	NC	NC	NC	NC	LEDA	LEDA